

# UL Listed Raintight EMT Steel Compression Connectors & Couplings

## Type 7000SR Raintight Connectors

**Use:**

To ground and secure EMT raceway to boxes and enclosures in wet locations.


**Features:**

- UL Listed Raintight
- InspectorRidge™ external visual inspection aid – See below
- No disassembly required
- Male hub threads NPS
- Available with and without insulated throat
- Concretetight

**Material/Finish:**

- Steel Body & Nut Zinc Electroplated
- Silicone Rubber Internal Sealing Ring
- EPDM Rubber KO Sealing Ring

Trade Size (inches)	Catalog Number	Insulated Throat Catalog Number	Dimensions in Inches		
			Body Length	Max Dia.	Thread Length
½	7050SR	7050SRT	1 <sup>29</sup> / <sub>32</sub>	1 <sup>5</sup> / <sub>32</sub>	7/ <sub>16</sub>
¾	7075SR	7075SRT	1 <sup>31</sup> / <sub>32</sub>	1 <sup>3</sup> / <sub>8</sub>	7/ <sub>16</sub>
1	7100SR	7100SRT	2 <sup>1</sup> / <sub>8</sub>	1 <sup>3</sup> / <sub>4</sub>	1 <sup>5</sup> / <sub>32</sub>



Type 7050SR – Type 7100SR

**Third Party Certification:**

UL Listed: E-14895  
Listed Raintight

**Applicable Third Party Standards:**

UL Standard: 514B  
NEMA: FB-1  
Federal Spec: W-F-408E

## Type 6000SR Raintight Couplings

**Use:**

To ground and secure EMT raceway sections together in wet locations.


**Features:**

- UL Listed Raintight
- InspectorRidge™ external visual inspection aid – See below
- No assembly required

**Material/Finish:**

- Steel Body & Nut Zinc Electroplated
- Silicone Rubber Internal Sealing Rings

Trade Size (inches)	Catalog Number	Dimensions in Inches	
		Body Length	Max. Dia.
½	6050SR	2 <sup>25</sup> / <sub>32</sub>	1 <sup>1</sup> / <sub>8</sub>
¾	6075SR	3	1 <sup>11</sup> / <sub>32</sub>
1	6100SR	3 <sup>11</sup> / <sub>32</sub>	1 <sup>5</sup> / <sub>8</sub>

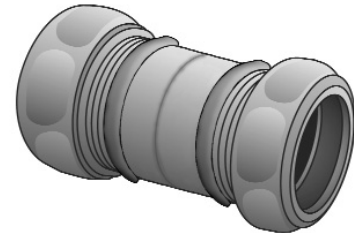


Type 6050SR – Type 6100SR

**Third Party Certification:**

UL Listed: E-14895  
Listed Raintight

**Applicable Third Party Standards:**

UL Standard: 514B  
NEMA: FB-1  
Federal Spec: W-F-408E

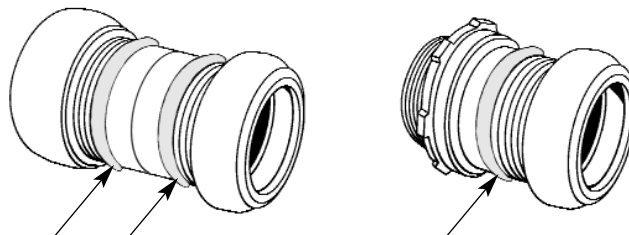

**InspectorRidge™**

Provides external visual inspection aid on outside surface, to assure raintight fittings are installed, without disassembly of conduit run.